

CFD Analysis of Supersonic Coaxial Jets on Effect of Compressible Spreading Rates

K. Kathiresan¹, M. Karthik², A. Balamani³, P. Gogulanathan⁴,
D. Thanikaivel Murugan⁵, S. Ilakkiya⁶

^{1,2,3,4}UG Final Year Student, Department of Aeronautical Engineering, Jeppiaar Engineering College, Chennai, India

⁵Ph.D Research Scholar, Department of Aeronautical Engineering, Sathyabama University, Chennai, India

⁶Ph.D Research Scholar, Department of Aerospace Engineering, MIT Campus, Anna University, Chennai, India

Abstract: Prevailing high-speed air-breathing propulsion systems invariably banks on coaxial jets which plays a vigorous role in stabilization of flames and combustion emission. Coaxial jets have applications in supersonic ejectors, noise control techniques and enhancement of mixing. Coaxial jet nozzles regulate spreading rates by developing virtuous mean flow and shortening primary flow potential core length. In the present paper, two-dimensional coaxial jet profiles of different area ratios are designed and analyzed. The models were designed in ANSYS Design Modeler and the numerical simulation was done in ANSYS FLUENT 14.5 using the two dimensional density based energy equation and transition SST turbulence model with primary supersonic flow and secondary subsonic flow. The contours of turbulent intensity, acoustics power level and axial-velocity are investigated along the flow direction. This study shows that increasing the area ratio results in varying turbulence which in turn varies the potential core length, acoustics power level, turbulent kinetic energy and noise generation.

Index Terms: Coaxial jets, spreading rates, potential core length, noise control, turbulence model, acoustics.

Introduction

The study of behavior of fluids developing from coaxial jets is of major concern in many engineering applications. Coaxial jets are simple configurations from which an inner supersonic flow and an outer subsonic flow deliver as shown in fig.1. From past two decades massive research has been performed over coaxial jets due to their capability to reduce noise, improve combustion and thrust augmentation. They even enhance the mixing flow issuing from the exhaust with ambient air. Even though the fluid mechanics of coaxial nozzle has been studied, the effect of spreading rates has not yet been massively investigated. In ref [1], the compressible spreading rate of supersonic jet flow into the high-speed co-flowing secondary jet for circular and triangular nozzles were studied experimentally and numerically.

In general, today's aircraft engines possess dual stream jets in which a hot high-speed primary flow is surrounded by a cold secondary flow. Compared with single jets, coaxial jets with round nozzles can develop flow structures of very different topology, depending on environmental and initial conditions and of course, on the temperature gradient between the inner or core stream and the bypass stream. In the coaxial jet, mixing is achieved mainly due to the velocity ratio, density ratio and compressibility and turbulence levels of the two streams, swirl, pressure gradient and free shear flows. In single jet engines, the spreading rate will be higher which results in generation of more noise and reduction in thrust. The mixing rate of flow with ambient air will be poor. The potential core length (length up to which the effect of shock waves exists from the nozzle exit) will be more.

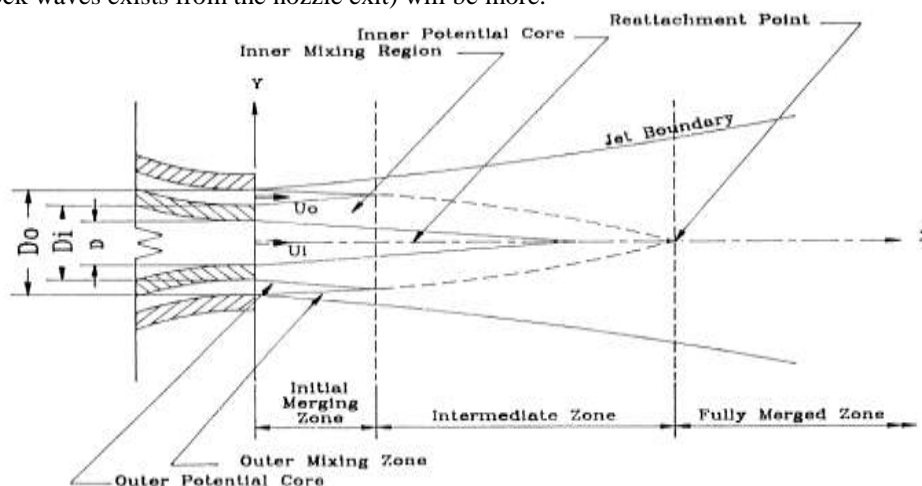


Figure 1- Simple Coaxial Nozzle Configuration

Coaxial jets are effective in producing turbulence. They control the spreading rates by reducing the growth rate of compressible mixing layer. Entraining of jet flow with atmospheric air is improved by increasing the turbulence. They reduce noise by providing shielding effect to potential flow. They also increase the thrust by reducing potential core length of primary flow. In the present study, detailed characteristics of coaxial jet nozzle shapes of four different area ratios (0.9, 1.8, 2.9 and 4.3) for the effect of flow spreading were analyzed. For all cases, a single axisymmetric convergent divergent nozzle and three conical secondary flow nozzles were examined. The primary and secondary nozzles are provided with Mach numbers 2.7 and 1 respectively.

Literature Review

A detailed literature survey of coaxial jets has been studied and some of the important work is specified. In ref. [2], Seung-CheolBaek, Soon-Bum Kwon, Byeong-Eun Lee, investigated the detailed characteristics of supersonic dual coaxial jets flow issuing from an inner supersonic nozzle and an outer sonic nozzle with various ejection angles. J. Philip Drummond [3] describes a numerical study of mixing strategies to enhance fuel-air mixing and reaction in scramjet engines.

Nicholas J. Georgiadis and Dimitri Papamoschou [4] investigated a series of coaxial dual-streams issuing into ambient air using Reynolds-averaged Navier-Stokes calculation with linear two-equation explicit algebraic stress turbulence modelling. Nevin Celik, Daniel W. Bettenhausen and Ryan D. Lovik [5], in their review performed a comprehensive numerical simulation to inter-relate the fluid mechanics of the formation of coaxial jets and their development downstream of the plane of jet emergence. Marco Debiassi and Dimitri Papamoschou [6], characterized the acoustics of axisymmetric high-speed jets at a variety of Mach numbers and velocities and at pressure-matched, overexpanded and underexpanded conditions.

Looking through the various research works conducted previously, the effect of spreading rates is not yet fully investigated. So, the primary motive of this study is to analyse coaxial jets of various area ratios and get clear idea about the influence of spreading rates on noise and thrust by comparing results of various parameters.

Methodology

A. Geometry

The four coaxial nozzle shapes were designed using ANSYS Design Modeler 14.5. Coaxial nozzle arrangements employed a fixed inner (primary) nozzle and outer (secondary) nozzles of different diameters. The primary nozzle has an exit diameter of $D_p = 12.7$ mm and is designed using Area-Mach number relation for Mach 2.7. Four conical secondary nozzles are used with exit diameters $D_s = 17.8, 21.6, 25.4, 29.2$ mm. The secondary nozzle has inner and outer converging angle of 11° and 23° . The total length of the nozzle arrangement is 80 mm. The fig. 2 depicts two-dimensional coaxial nozzle model geometry configurations with $D_s = 29.2$ mm. The different coaxial nozzle configurations are summarized in TABLE 1

Table 1: Coaxial Nozzle Configurations

Nozzle	Secondary Exit Diameter (mm)	D_s/D_p	A_s/A_p
Model 1	17.8	1.4	0.9
Model 2	21.6	1.7	1.8
Model 3	25.4	2.0	2.9
Model 4	29.2	2.3	4.3

B. Computational Grids

For all the coaxial nozzle configurations listed in Table 1, four zone quadrilateral elements mesh are used. For each of the cases proximity and curvature sizing functions, fine grids are used. All quadrilateral elements constructed have 89950 total points. The grids are extended by $45D_p$ downstream of the nozzle exit and $8 D_p$ vertically from the axis of symmetry.

C. Computational Method

The solver used in this work is ANSYS FLUENT- Version 14.5. Transition SST four-equation formulations are employed to calculate the jet flows. The equation used here is of standard model and standard wall functions. For every models implicit formulation, AUSM flux type solution methods are used. Flow spatial discretization used is of the order of one.

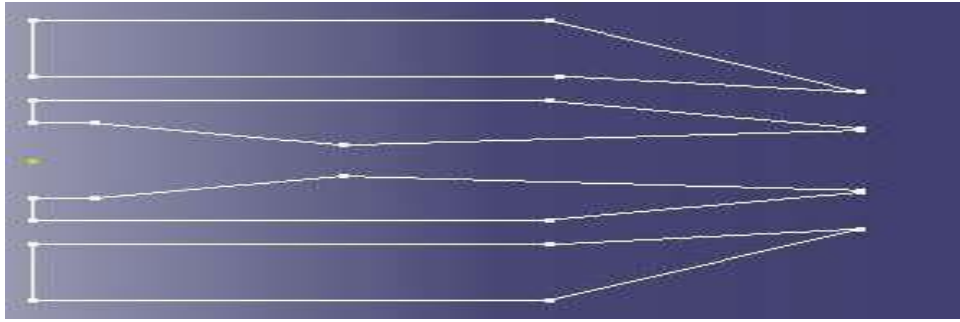


Figure 2: Two-Dimensional Coaxial Nozzle Model Geometry

D. Boundary Conditions

Air from reservoir at calculated temperature was supplied to primary and secondary nozzles. The air used here is ideal-gas. The inflow boundary conditions of primary and secondary nozzle flows corresponds to under expanded Mach number of the flow condition. The primary and secondary downstream static pressure is set to 0.9 atm and ambient pressure respectively.

Results and Discussion

The analysis was done till the residuals attain a steady state. The four models analyzed were used to study the effect of spreading rates of flow. In all the cases, the flow from primary nozzle results in under expanded condition at nozzle exit where the observed Mach is 2.79 which is less than the design Mach number 2.7. This is due to displacement of turbulent boundary layer thickness which reduces the effective ratio of nozzle exit area to throat area. Contours of axial velocity for all the four models are shown in fig. 3. From the figure, we could see that velocity of the flow is large at the exit of the nozzle. Further, downstream the velocity of flow decreases due to rapid mixing with the surrounding air. From this, the primary jet velocity decay rate can be understood. The potential core length of the flow will be more, if jet decays at a slower rate and vice-versa.




Area Ratio- 0.9



Area Ratio- 1.8




Area Ratio- 2.4

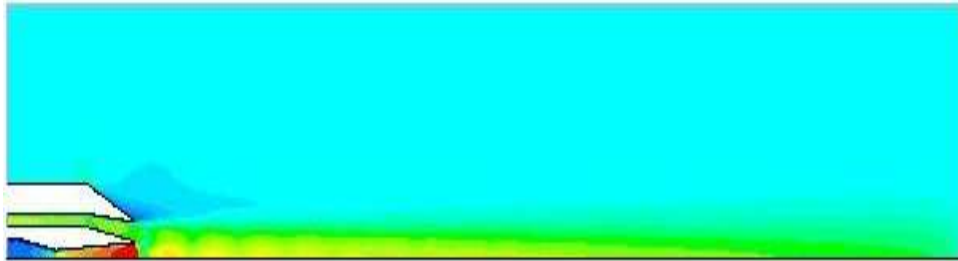


Area Ratio- 4.3

Figure 3: Axial Velocity


Contours of turbulence intensity are depicted in fig. 4. The model of area ratio 0.9 has a shorter potential core with a region of peak turbulence at upstream of the flow than the others. From the figure, we could see that the flow mixes rapidly at the upstream of the nozzle exit. Figure shows magnitude of turbulence intensity decreases with increasing area ratio. The secondary lip line also shows little difference in the initial region with a fairly constant intensity.

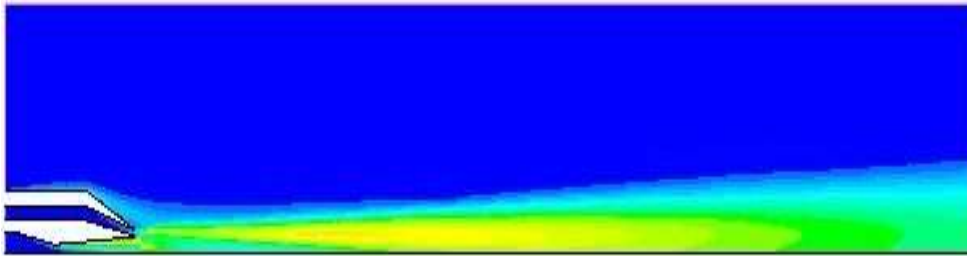


Area Ratio- 0.9

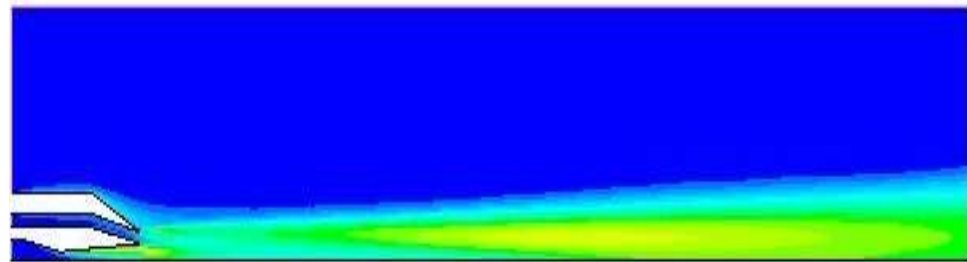

Area Ratio- 1.8

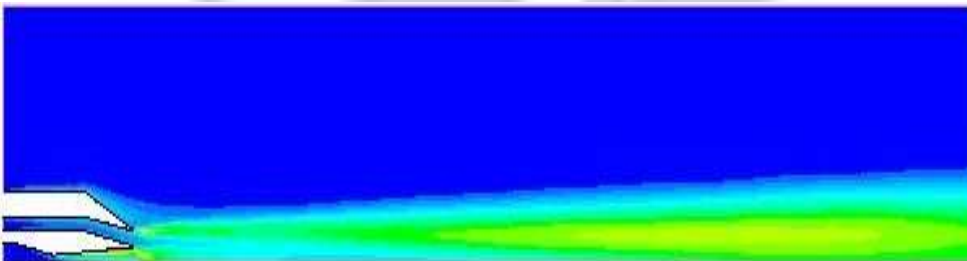


Area Ratio- 2.4

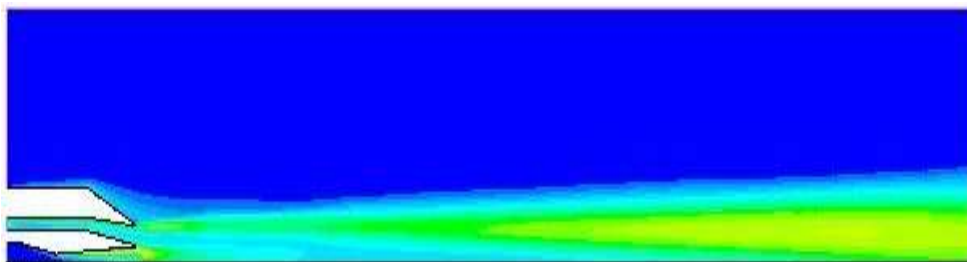


Area Ratio- 4.3

Figure 4: Turbulence Intensity


Contours of acoustics power level are shown in fig. 5. It is evident from the fig. that the level of acoustics increases from with area ratio. The model 4 has less acoustics power than the other three models.

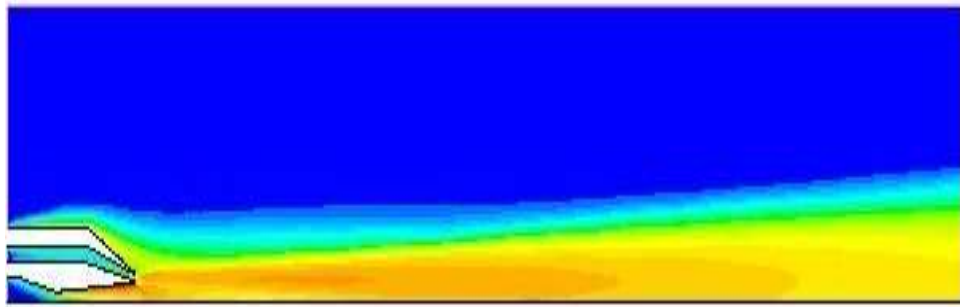


Area Ratio- 0.9

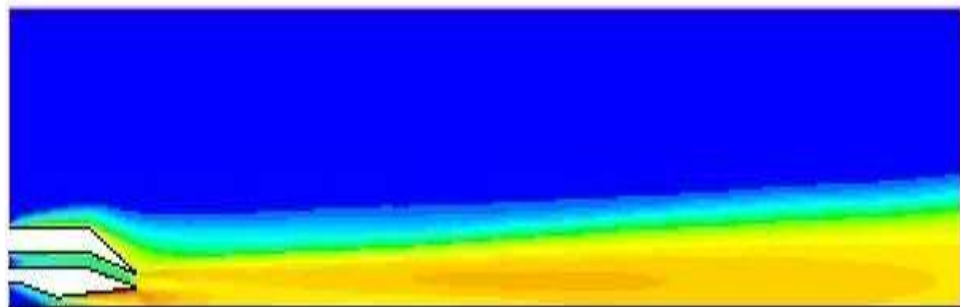

Area Ratio- 1.8

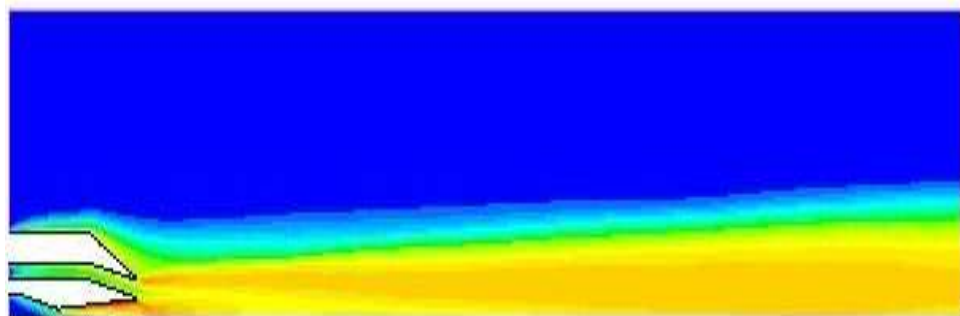

Area Ratio- 2.4

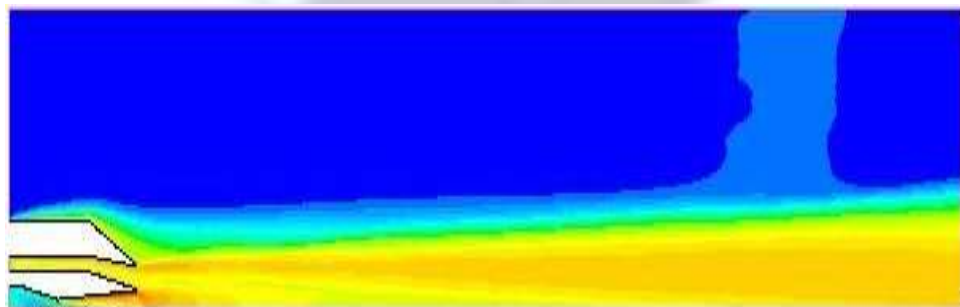

Area Ratio- 4.3

Figure 5: Acoustics Power Level

The profiles of various parameters for all the models were depicted below and discussed. Fig.6 shows profile of model 1. This model has a maximum Velocity 780.052 m/s, acoustic power level 157.9088 dB, turbulent intensity 6.36%. Fig.7 depicts the flow properties for model 2. This model has a maximum Velocity 781.353 m/s, acoustic power level 157.9156 dB, turbulent intensity 6.35%.

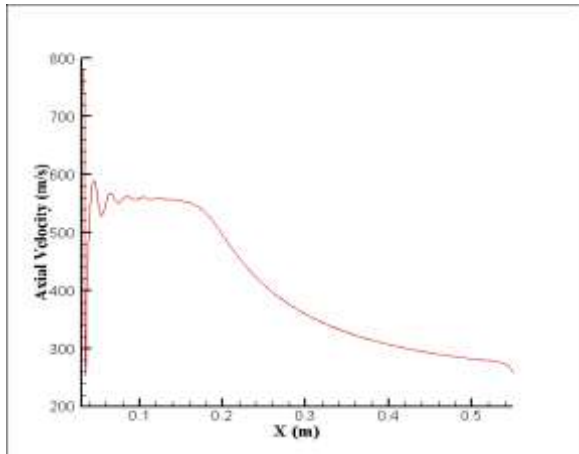


Figure 6.a- Axial Velocity

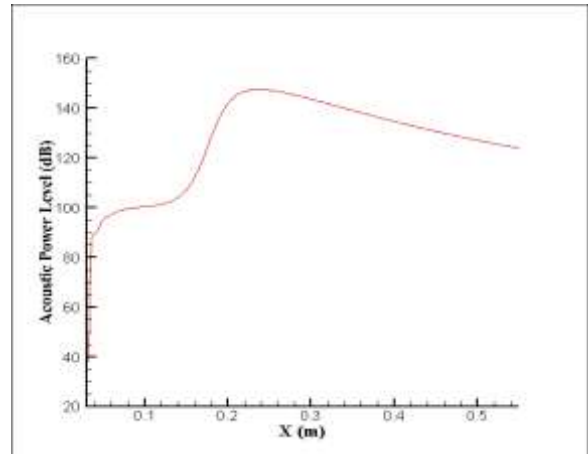


Figure 6.b- Acoustic Power Level

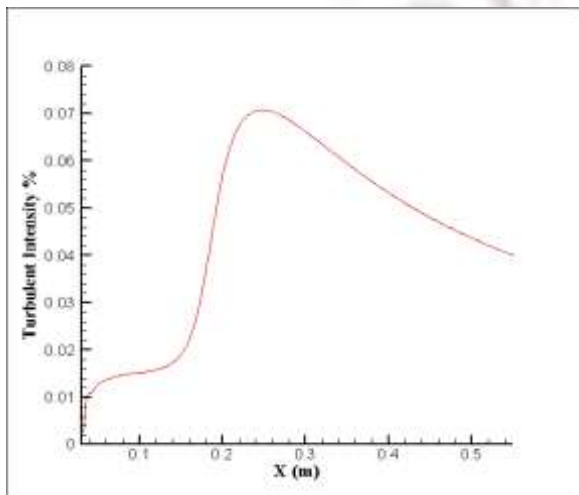


Figure 6.c- Turbulent Intensity

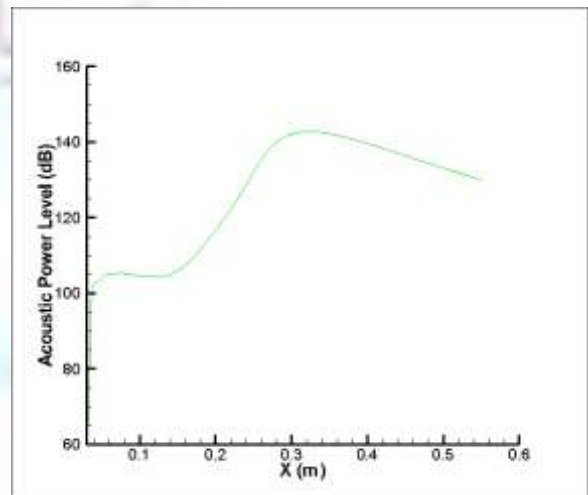


Figure 7.b- Acoustic Power Level

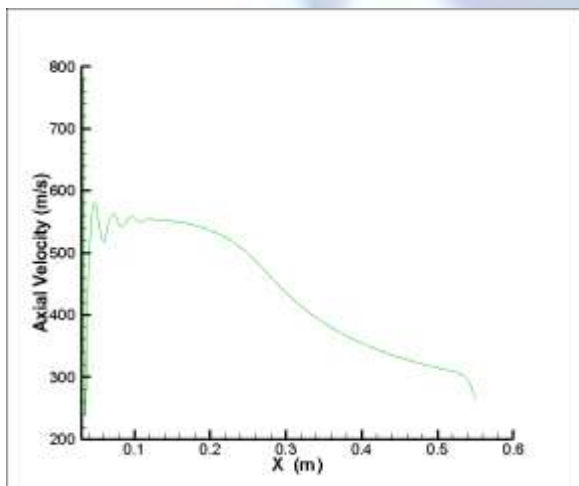


Figure 7.a- Axial Velocity

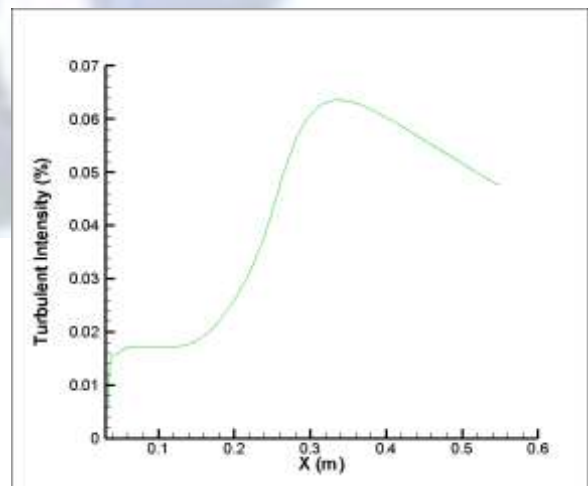


Figure 7.c- Turbulent Intensity

Fig. 8 depicts the flow properties for model 3. This model has a maximum Velocity 783.1005 m/s, acoustic power level 157.404 dB, turbulent intensity 6.47%. Fig. 9 depicts the flow properties for model 4. This model has a maximum Velocity 779.494 m/s, acoustic power level 157.909 dB, turbulent intensity 6.38%.

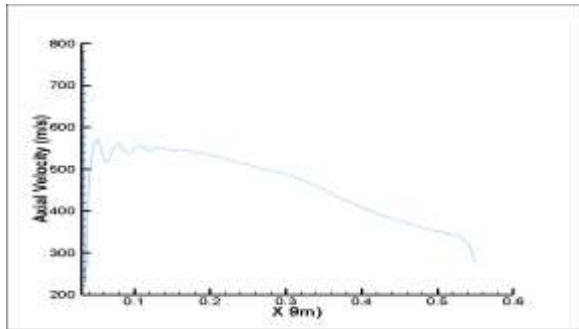


Figure 8.a- Axial Velocity

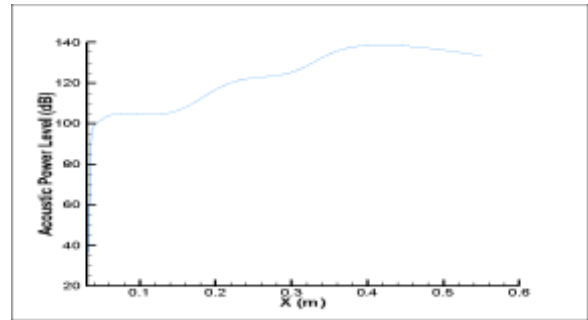


Figure 8.b- Acoustic Power Level

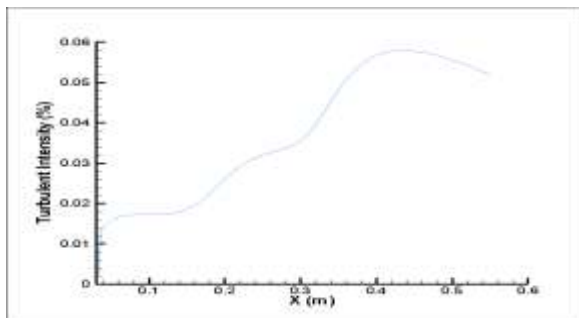


Figure 8.c- Turbulent Intensity

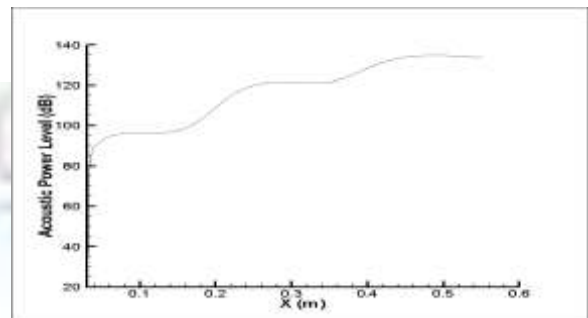


Figure 9.b- Acoustic Power Level

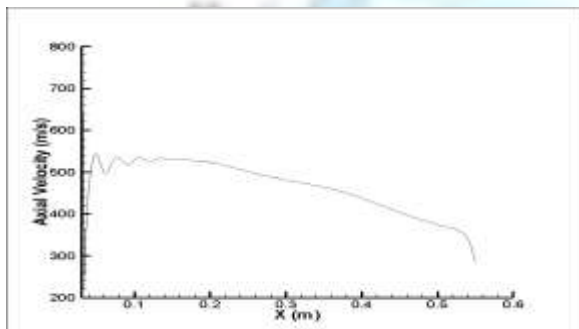


Figure 9.a- Axial Velocity

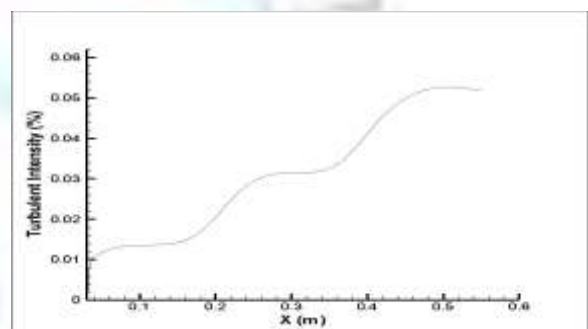


Figure 9.c- Turbulent Intensity

Comparison

Detailed comparisons of axial velocity, turbulence intensity, turbulence kinetic energy, acoustic power levels are shown in figure below. The graphs plotted for various variables are from the nozzle exit along the flow direction. It is evident from figure that the flow properties reaches the peak value at the nozzle exit and decays along downstream direction.

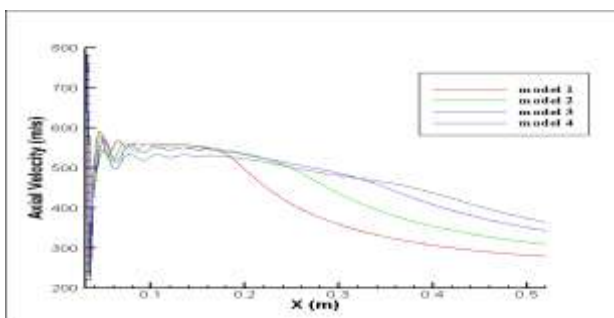


Figure 10- Axial Velocity

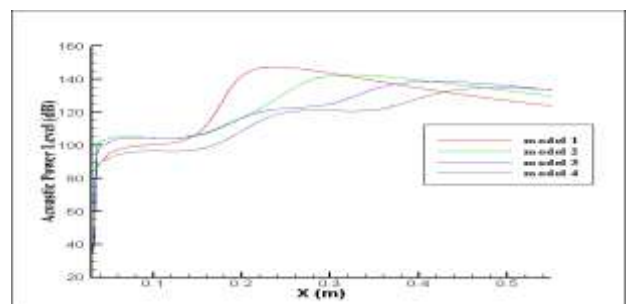


Figure 11- Acoustic Power Level

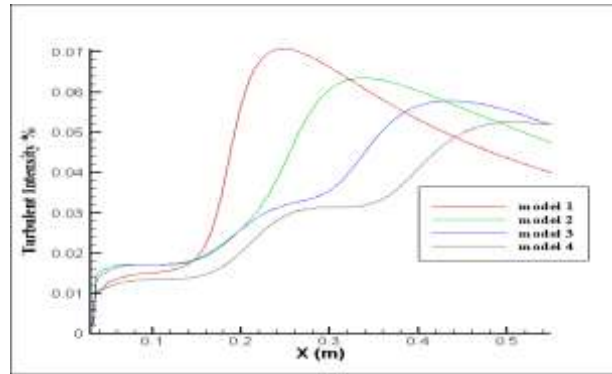


Figure 12- Turbulent Intensity

The axial velocity profile shows that increasing the area ratio reduces the exit velocity. The nozzle shape with minimum exit diameter has larger exit velocity. The model of secondary exit diameter $D_s = 25.4$ mm delivers more velocity 783.1005 m/s whereas the model of secondary exit diameter $D_s = 29.2$ mm has less velocity than others. The acoustic power level is depicted in fig. 11. From the graph, it is summarized that model 2 generate less power 157.4 dB and model 4 produces huge amount of power 157.91 db. Fig 12 depicts turbulence intensity comparison. Model 3 has more turbulence intensity of 6.47%. This depicts the enhanced mixing of flows from both nozzles and ambient air. The peak of intensity moves along downstream direction.

Acknowledgement

The authors would like to thank our Director, Principal and Mr. G. Prabhakaran, Professor and Head, Department of Aeronautical Engineering, Jeppiaar Engineering College, Chennai for his helpful and continuous support throughout this project. The authors also thank their parents and friends for their encouraging words and support.

Conclusion

The results of this study indicate that analysis employing linear two-equation turbulence modeling can predict the effect of spreading rates of high-speed coaxial jets reasonably well. The knowledge gained in the computational approach enabled the examination of turbulent kinetic energy in the developing jet. It was observed that peak kinetic energy magnitude increased to a particular value and then decreases with increasing secondary nozzle diameter. The location of the peak also moves downstream along the flow direction. Finally, we conclude that the increasing area ratio of secondary to primary nozzle increases the spreading rate. This results in varying turbulence which results in variation in potential core length which in turn changes the thrust and generation of noise.

References

- [1]. N.Karthikeyan, B.T.N.Sridhar, Studies on effect of jet shapes in the coaxial supersonic jet spreading rates, International Journal of Mechanical Engineering Applications Research, Vol. 02, Issue 02; August- December 2011.
- [2]. Seung-Cheol Baek, Soon-Bum Kwon, Byeong-Eun Lee, An Experimental Study of Supersonic Dual Coaxial Free Jet, KSME International Journal, Vol. 17 No. 12, pp. 2107~2115, 2003.
- [3]. J. Philip Drummond, Enhancement of Mixing and Reaction in High-Speed Combustor Flow field, International Colloquium on Advanced and Analysis of Combustion, 1997, Moscow, RUSSIA.
- [4]. Nicholas J.Georgiadis and Dimitri Papamoschou, Computational Investigations of High-Speed Dual-Stream Jets, 9th AIAA/CEAS Aeroacoustics Conference and Exhibit, 12-14 May 2003, Hilton Head, South Carolina.
- [5]. Nevin Celik, Daniel W.Bettenhausen and Ryan D.Lovik, Formation of Co-Axial Jets and Their Downstream Development, No name manuscript.
- [6]. Marco Debiasi and Dimitri Papamoschou, Noise from Imperfectly Expanded Supersonic Coaxial Jets, AIAA JOURNAL Vol. 39, No. 3, March 2001.
- [7]. G.J.Page, J.J.McGuirk, P.Behrouzi, M.Hossain, A CFD Coupled Acoustics Approach for the Prediction of Coaxial Jet Noise, No name manuscript.
- [8]. Antoine Guitton, Charles E.Tinney, Peter Jordan, Joel Delville, Measurements in a co-axial subsonic jet, 45th AIAA Aerospace Sciences Meeting and Exhibit, 8-11 January, 2007 .
- [9]. Christopher K.W.Tam and Nikolai N.Pastouchenko, Fine scale turbulence noise from Dual-Stream jets, AIAA Journal, Vol. 44, No. 1, January 2006.
- [10]. Erina Murakami and Dimitri Papamoschou, Mean Flow Development in Dual-Stream Compressible Jets, AIAA JOURNAL Vol. 40, No. 6, June 2002.
- [11]. J.M.Khodadadi and N.S.Vlachos, Experimental and Numerical Study of Confined Coaxial Turbulent Jets, AIAA JOURNAL VOL. 27, NO. 5.

- [12]. N.L.Narasimha Reddy, P.Manivannan and K.M.KiranBabu, The CFD Analysis of Turbulence Characteristics in Combustion Chamber with Non Circular Co-Axial Jets, IOSR Journal of Mechanical and Civil Engineering, Vol 6, Issue 2, March-April 2013.
- [13]. J.W.Nichols, F.E.Ham, S.K.Lele and P.Moin, Prediction of supersonic jet noise from complex nozzles, Center for Turbulence Research Annual Research Briefs 2011.
- [14]. K.K.J.Ranga Dinesh, A.M.Savill, K.W.Jenkins, M.P.Kirkpatrick, A STUDY OF MIXING AND INTERMITTENCY IN A COAXIAL TURBULENT JET, Fluid Dynamics Research, volume 42 November 2, 2010,025507.
- [15]. C.A.Lin, Modeling a coned swirling coaxial jet, Center for Turbulence Research Annual Research Briefs 1998.
- [16]. E.VILLERMAUX and H.REHAB, Mixing in coaxial jets, J. Fluid Mech. (2000), vol. 425, pp. 161185. Printed in the United Kingdom.
- [17]. Elmar Groschel , Wolfgang Schroder and Matthias Meinke ,NOISE SOURCES IN SINGLE AND COAXIAL JETS ,European Conference on Computational Fluid Dynamics ,ECCOMAS CFD 2006 P.Wesseling, E.Onate and J.Periaux (Eds) @TU Delft, Netherlands, 2006 10th Annual CFD Symposium 11th – 12th August 2008.
- [18]. Alessandro Talamelli and Antonio Segalini, Lock-in phenomenon in coaxial jets No name manuscript no.
- [19]. K.Kathiresan, A.Balamani, M.Karthik, P.Gokulanathan, D.Thanikaivel Murugan and S.Ilakkiya, CFD Analysis of Supersonic Coaxial Jets on Effect of Spreading Rates, International Journal of Engineering Research and Applications, ISSN:2248-9622, Vol.4, Issue 4(Version 1), April 2014, pp.29-35.
- [20]. Rodrigo K.Decker, Lizoel Buss, Vinicyus R.Wiggers, Dirceu Noriler, Edelberto L.Reinher, Henry F.Meier, Waldir P.Martignoni, Milton Mori, Numerical Validation of a Coaxial and Confined Jet Flow, No name manuscript No.
- [21]. A.D.Cutler and J.A.White, “An Experimental and CFD Study of a Supersonic Coaxial Jet, AIAA-2001-0143.

