

# Stochastic Analysis of a system having two dissimilar components and two service facilities

Praveen Gupta<sup>1</sup>, Ruchi Yadav<sup>2</sup>

<sup>1,2</sup>School of studies in statistics Vikram Univesity, Ujjain (M. P.) (India)

## ABSTRACT

In order to improve reliability, system is considered. The system has two dissimilar components working in parallel. The failure time of the components are assumed to be exponentially distributed with different parameters. Failure of one component puts the work pressure on the second component, causing its changed (increased) failure rates. There are two repair facilities to repair the components. The repair time distribution of each server is exponential. We obtain the expressions for reliability, the mean time to system failure (MTSF) and steady state availability for both the systems.

**Key Words:** Availability, Exponential Distribution, Mean time to system failure, Reliability.

## I. INTRODUCTION

Two- unit standby system models have been widely studied in the literature of reliability due to their frequent and significant use in modern business and industry. Recently, Mokaddis and Matta (2010), Khaled (2010) and Sharma et.al (2010) have studied two unit standby systems. They have considered a single repair facility to repair both the units. When both the units are failed, one failed unit waits for repair .Researchers in reliability have shown keen interest in the analysis of two (or more) component parallel systems. Owing to the practical utility in modern industrial and technological set-ups of these systems, we come across with the systems in which the failure in one component affects the failure rate of the other component.

## II. SYSTEM DESCRIPTION

- The system consists of a single unit having two dissimilar components, say A and B arranged in parallel.
- Failure of one component affects the failure rate of the other component due to increase in working stresses.
- The system remains operative even if a single component operates.
- There are two repair facilities to repair the components. When both the components are failed, they work independently on each component.
- The repair rates are different, when both the repair facilities work on same component and when both work on different components.
- After repair, each component is as good as new.

## III. NOTATIONS AND STATES OF THE SYSTEM

E = Set of regenerative States

$\lambda_1$   $\lambda_2$  Constant failure rate of component A when B is also operating

$\lambda_3$   $\lambda_4$  Constant failure rate of component B when A is also operating

$\lambda_5$   $\lambda_6$   $\lambda_7$   $\lambda_8$   $\lambda_9$   $\lambda_{10}$   $\lambda_{11}$   $\lambda_{12}$  failure rate of component A when B has already failed

$\beta'$   $\beta''$  failure rate of component B when A has already failed

$\gamma$  repair rate of component A when B is operating

$\delta$  = repair rate of component B when A is operating

$\theta$  = repair rate of component B when A is also under repair

$\eta$  = repair rate of component A when B is also under repair

$\mu$  = rate of conducting preventive maintenance


$\lambda$  = rate with which system goes for preventive maintenance.

- $A_N$  : component A is in normal mode and operative
- $B_N$  : component B is in normal mode and operative
- $A_R$  : component A is under repair
- $B_R$  : component B is under repair
- $A_f$  : component A is in failure mode needs repair
- $B_f$  : component B is in failure mode needs repair
- $A_{NP}$  : component A is under preventive maintenance
- $B_{NP}$  : component B is under preventive maintenance.

The system can be in one of the following states:

Up states:  $S_0 (A_N B_N)$ ,  $S_1 (A_R B_N)$ ,  $S_2 (A_N B_R)$

Down states:  $S_3 (A_f B_f)$

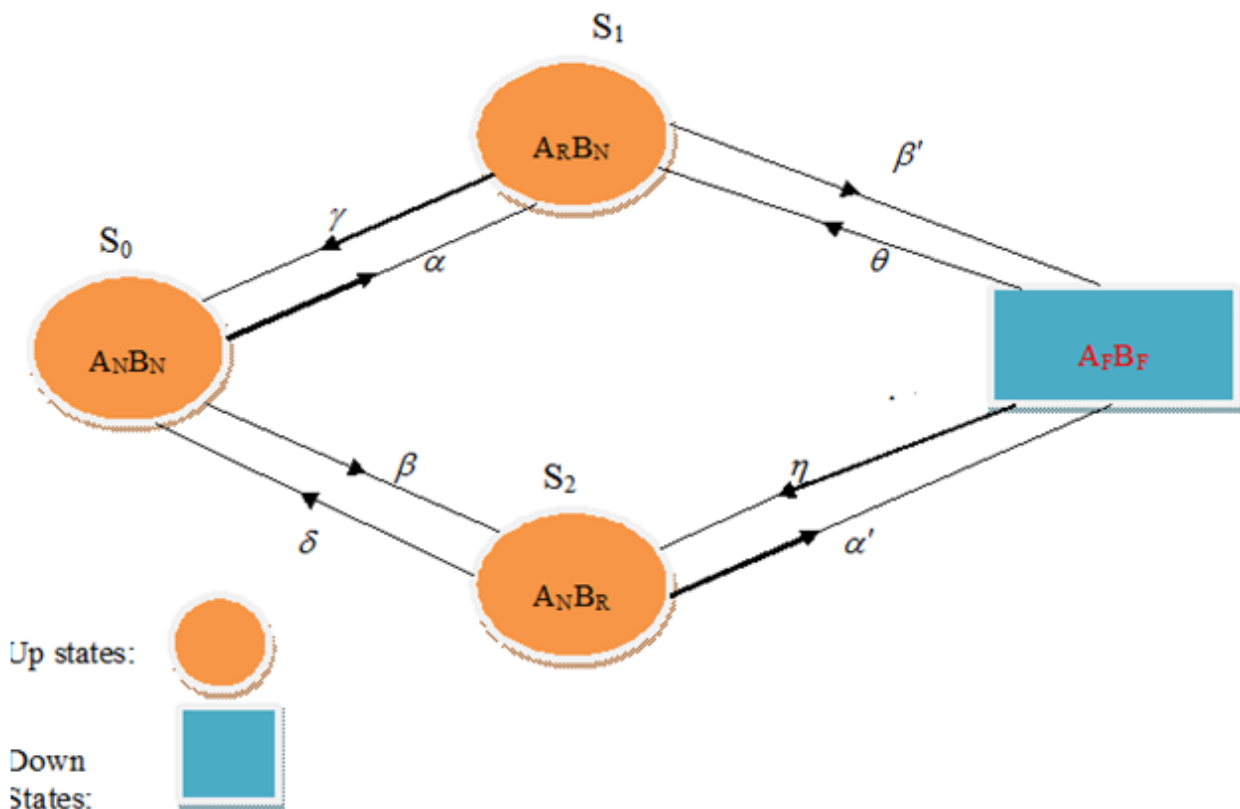

State Transition Diagram for the first System

#### IV. TRANSITION PROBABILITIES AND SOJOURN TIMES

Let  $T_0 (=0)$ ,  $T_1$ ,  $T_2, \dots$  be the epochs at which the system enters the state  $S_i \in E$ , and let  $X_n$  denotes the state entered at epoch  $T_{n+1}$ , i.e. just after the transition of  $T_n$ . Then  $\{X_n, T_n\}$  constitute a Markov- renewal process with the state space  $E$ , and

$$Q_{ij}(t) = \Pr[X_{n+1} = S_j, T_{n+1} - T_n \leq t \mid x_n = S_i]$$

Then the transition probability matrix of the embedded Markov chain is :

$$P = (P_{ij}) = \lim_{t \rightarrow \infty} Q_{ij}(t) = Q(\infty)$$

By simple probabilistic considerations, the non-zero elements of  $Q_{ij}(t)$  are:

$$\begin{aligned}
 Q_{01}(t) &= \int_0^t \alpha e^{-(\alpha+\beta)u} du, & Q_{02}(t) &= \int_0^t \beta e^{-(\alpha+\beta)u} du \\
 Q_{10}(t) &= \int_0^t \gamma e^{-(\gamma+\beta)u} du, & Q_{13}(t) &= \int_0^t \beta e^{-(\gamma+\beta)u} du \\
 Q_{20}(t) &= \int_0^t \delta e^{-(\alpha+\delta)u} du, & Q_{23}(t) &= \int_0^t \alpha e^{-(\alpha+\delta)u} du \\
 Q_{31}(t) &= \int_0^t \theta e^{-(\theta+\eta)u} du, & Q_{32}(t) &= \int_0^t \eta e^{-(\theta+\eta)u} du
 \end{aligned} \quad (1)$$

Taking limit as  $t \rightarrow \infty$ , the steady state transition probabilities  $p_{ij}$  can be obtained from (1). Thus

$$P_{ij} = \lim_{t \rightarrow \infty} Q_{ij}(t)$$

$$p_{01} = \alpha / (\alpha + \beta) \quad p_{02} = \beta / (\alpha + \beta) \quad p_{10} = \gamma / (\gamma + \beta) \quad p_{13} = \beta / (\gamma + \beta)$$

$$p_{20} = \delta / (\alpha + \delta) \quad p_{23} = \alpha / (\alpha + \delta) \quad p_{31} = \theta / (\theta + \eta) \quad p_{32} = \eta / (\theta + \eta)$$

From the above probabilities the following relations can be easily verified as:

$$p_{01} + p_{02} = p_{02} + p_{23} = p_{10} + p_{13} = p_{31} + p_{32} = 1.$$

## V. MEAN SOJOURN TIMES

The mean time taken by the system in a particular state  $S_i$  before transiting to any other state is known as mean sojourn time and is defined as

$$\mu = \int_0^\infty P[T > t] dt$$

Where  $T$  is the time of stay in state  $S_i$  by the system.  $s$

To calculate mean sojourn time  $\mu_i$  in state  $S_i$ , we assume that so long as the system is in state  $S_i$ , it will not transit to any other state. Therefore,

$$\mu_0 = \int_0^\infty e^{-(\alpha+\beta)t} dt = 1/(\alpha + \beta), \mu_1 = 1/(\gamma + \beta), \mu_2 = 1/(\alpha + \delta), \mu_3 = 1/(\theta + \eta). \quad (2)$$

## VI. RELIABILITY AND MEAN TIME TO SYSTEM FAILURE (MTSF)

To determine  $R_i(t)$ , the reliability of the system when it starts initially from regenerative state  $S_i$  ( $i=1,2$ ), We assume the failed state  $S_3$  as absorbing. Using simple probabilistic arguments in regenerative point technique, we have

$$R_0(t) = Z_0(t) + q_{01}(t) \odot R_1(t) + q_{02}(t) \odot R_2(t)$$

$$R_1(t) = Z_1(t) + q_{10}(t) \odot R_0(t)$$

$$R_2(t) = Z_2(t) + q_{20}(t) \odot R_0(t), \quad (3)$$

Where we define  $Z_i(t)$  as the probability that starting from state  $S_i$  the system remains up till epoch  $t$  without passing through any regenerative state.

$$Z_0(t) = e^{-(\alpha+\beta)t}, \quad Z_1(t) = e^{-(\gamma+\beta)t}, \quad Z_2(t) = e^{-(\alpha+\delta)t}$$

Taking Laplace transform of relations and solving, we get

$$R_0^*(s) = \frac{Z_0^* + q_{01}^* Z_1^* + q_{02}^* Z_2^*}{1 - q_{01}^* q_{10}^* - q_{02}^* q_{20}^*} \quad (4)$$

Here for brevity the argument  $s$  is omitted. Now by taking the limit as  $s \rightarrow 0$  in equation (4), the mean time to system failure when the initial state  $S_0$ , is

$$E(T) = \frac{\mu_0 + p_{01}\mu_1 + p_{02}\mu_2}{1 - p_{01}p_{10} - p_{02}p_{20}} \quad (5)$$

## VII. AVAILABILITY ANALYSIS

Let  $A_i(t)$  be the probability that starting from state  $S_i$  the system is available at epoch  $t$  without passing through any regenerative state,

Now, obtaining  $A_i(t)$  by using elementary probability arguments:

$$A_0(t) = Z_0(t) + q_{01}(t) \odot A_1(t) + q_{02}(t) \odot A_2(t)$$

$$\begin{aligned}A_1(t) &= Z_1(t) + q_{10}(t) \odot A_0(t) + q_{13}(t) \odot A_3(t) \\A_2(t) &= Z_2(t) + q_{20}(t) \odot A_0(t) + q_{23}(t) \odot A_3(t) \\A_3(t) &= q_{31} \odot A_1(t) + q_{32}(t) \odot A_2(t)\end{aligned}$$

Taking Laplace transform of above equations and solving for  $A_0^*(s)$ , by omitting the argument 's' for brevity, we get

$$A_0^*(s) = \frac{N_1(s)}{D_1(s)}$$

Where

$$\begin{aligned}N_1(s) &= [Z_0^* + q_{01}^* Z_1^* + q_{02}^* Z_2^*] [1 - q_{13}^* q_{32}^* q_{23}^*] + [q_{01}^* q_{13}^* + q_{02}^* q_{23}^*] [q_{31}^* Z_1^* + q_{32}^* Z_2^*] \\D_1(s) &= [1 - q_{13}^* q_{31}^* - q_{23}^* q_{32}^*] [1 - q_{01}^* q_{10}^* q_{20}^* q_{02}^*] - [q_{01}^* q_{13}^* + q_{02}^* q_{23}^*] [q_{32}^* q_{20}^* + q_{31}^* q_{10}^*]\end{aligned}$$

Therefore, the steady state availability of the system when its starts operation from  $S_0$  is

$$A_0(\infty) = \lim_{t \rightarrow \infty} A_0(t) = \lim_{s \rightarrow 0} s.A_0^*(s) = N_2(0) / D_2(0) = N_2 / D_2$$

Where  $N_1$  and  $D_1$  are as

$$N_1 = N_1(0) = (\square_0 + P_{01}\square_1 + P_{02}\square_2)(1 - P_{13}P_{31} - P_{32}P_{23}) + (P_{01}P_{13} + P_{02}P_{23})(P_{31}\square_1 + P_{32}\square_2) \quad (6)$$

$$D_1 = D_1(0) = (P_{20}P_{32} + P_{01}P_{31})\mu_1 + (P_{32}P_{13} + P_{02}P_{23})\mu_2 \quad (7)$$

## CONCLUSION

This paper describes an improvement over the Khaled (2010) and Sharma et.al (2010) have studied two unit standby systems. They have considered a single repair facility to repair both the units. Using regenerative point technique reliability analysis, availability analysis, busy period analysis which shows that the proposed model is better than Khaled and Sharma (2010).

## REFERENCES

- [1] Mokaddis, G.S. Matta, C.H. (2010). Cost analysis of a two dissimilar - unit Cold standing redundant
- [2] system subject to inspection and random change in units, Journal of Mathematics and statistics 6(3), 306-315.
- [3] Navpreet Singh Tung, Ashutosh Bhadoria, Kiranpreet Kaur, Simmi Bhadauria, Dynamic programming model based on cost minimization algorithms for thermal generating units, International Journal of Enhanced Research in Science Technology & Engineering, Volume 1, Issue 3, ISSN: 2319-7463, 2012.
- [4] Khaled M. El-said, (2010). Stochastic analysis of a two - unit cold standby system with two stage repair and waiting time. The Indian Journal of Statistics, 72 (B), 188, 1-10.
- [5] Sharma, S.K. Depankar Sharma and Vinita Sharma, (2010). Reliability measures for a system having two dissimilar cold standby units with random check and priority repair. Journal of Mathematics and statistics, 2(2) 69-74.
- [6] Navpreet Singh Tung, Gurpreet Kaur, Gaganpreet Kaur, Amit Bhardwaj, Optimization Techniques in Unit Commitment A Review, International Journal of Engineering Science and Technology (IJEST), Volume 4, Issue, 04, Pages 1623-1627.
- [7] Goel, L.R. and Gupta, P. (1984). Stochastic analysis of a two unit parallel system with partial and catastrophic failures and preventive maintenance. Micro electron Reliability, 24 ,881-883.