

Humanoid Robot Control System by Wireless-Marionette Style

Shamim¹, R. Jayamma², K. Siva Naga Raju³

^{1,2,3}K. B. N. College (Autonomous), Vijayawada-520001, Andhra Pradesh, India

ABSTRACT

When a speaker communicates a message to the listener, it can be expected to be transmitted more accurately by attaching an appropriate gesture to message. That theory is valid, whether the speaker and the listener are near or far away. However, for a speaker to deliver messages and gestures to a remote listener synchronously, it is necessary to have a real-time conversation system using video images. Therefore, in this research, we propose a mechanism for presenting gestures synchronized with gestures at low cost when sending messages to remote listeners. To realize that, we develop a method to move the robot near the speaker instead of conveying the gesture of the speaker by the video shot. In this proposed method, motion data of the hand of the speaker is acquired using a motion sensor, the data is processing, converting into information for moving the motor corresponding to the joint of the robot, and the information is transmitting to the remote robot, the robot moves with motion according to the intention of the speaker. To realize the proposed method, we prepared a mechanism to convert the hand gesture of the speaker into the motion data of the robot in real time and manipulate the robot in a remote place. In our system, we realize a function to transmit information of high urgency such as disaster information all at once to robots installed in each household. Based on these requirements, we developed a prototype of an information presentation system. By using this system, we expect the speaker's message to communicate to the multiple listeners effectively.

Keywords: Remote Control, Humanoid Robot, Human Gesture, Robot Motion, Telepresence

INTRODUCTION

Recently, robot technology has been rapidly evolving. It is to enrich people's lives by utilizing robots for society. For example, security robots that protect public security, nursing robots for supporting care recipients. Extreme high safety is most important to put these robots into practical use in society. In addition, people need to feel an affinity with robots. Implementing the function to realize natural communication between the robot and the human being is a particularly important task.

We have acquired surrounding environmental data using various sensors, analyzed the data by computer, derived useful information, and effectively present that information to people. The purpose of these studies is that computers help people in various situations of human life. And, we aim to build a system that prevents the occurrence of obstacles and accidents by advising people on the risk factors that threaten people's save lives.

In this research project, we have developed a system that makes it easy to transmit and visualize data obtained by measuring intra-building Wi-Fi radio intensity [1]. As another research, by continuing to observe the indoor environment, we realized a system that warns by voice message when the temperature and humidity become high and the risk of heat stroke increases [2]. And, we have constructed a system aiming at sustaining concentration by working on olfaction when the driver of the car is going ahead [3]. Further, we built a system that effectively communicates information through the robot according to the driving situation of the car and the content of information transmission [4][5].

Because of those researches, when conveying a message to a person using a robot, we found that it is good to send the movement of the robot synchronously with the voice message. However, continuing to steer the remote robot at the same time as the speaker is speaking is a complicated task. For a robot to present a motion simultaneously with a word to a listener at a remote place, a mechanism is required to enable the speaker to steer the robot with a simple gesture.

Also, it is necessary to have a mechanism in which a robot located in a remote place moves without delay according to the manipulation of the speaker.

In this paper, we first define a robot motion design scheme that encompasses various combinations among different sensing technologies and robots. Then, we elaborate an implementation method for a specific case among the combinations. With the remote message transmission method incorporating the mechanism proposed here, the speaker

can transmit the message and the motion to the remote listener through the robot only with a simple operation. We expect that the acceptance level of listeners' messages will increase with the combination of remote language communication and nonverbal communication and communication robots. Our goal is to construct a robot motion design method that is independent of specific devices and technologies as much as possible.

RELATED WORK

In this research, the humanoid robot expects the speaker to play a role as an interface for correctly communicating what he wishes to tell the hearer. Research that transmits information via a robot has been conducting in various ways.

Matsui et al. propose that the humanoid robot has some advantage for mapping man movements to robot motions [6].

Patsadu et al. proposed a method to detect the gesture of the whole body of a person by learning the joint shape of the person photographed by the depth camera of the light coding system [7]. It is a difficult task for appropriately designing and creating motion data so that the robots behave like a human. The most promising method is to directly use human behaviors as is and map them to the series of commands for driving the robots. Jung et al. propose that not only when the robot is speaking, but also when you are not singing voice send the message appropriately by using the motion of the robot [8].

Even in past research, they used humanoid robots as interfaces for delivering messages to humans. Williams and Breazeal have developed a robot of AIDA (Affective Intelligent Driving Agent) that sends a message to encourage safe driving [9]. They installed it on the dashboard of the car and conducted experiments and proved that providing the message via the robot is effective. Zeng et al. are working on research to realize a guide dog by a robot for guiding the visually impaired and living support [10]. Liang et al. introduced a rehabilitation support robot that realizes two-way communication to restore the physical function of a stroke patient and showed that it is effective for improving the motor function of patients [11]. Miyachi et al. introduce that both the recreation for health caregivers and the health gymnastics were effective by using the humanoid robot's speaking and action functions together at the care facility [12].

There are many studies so far in the field of Telepresence, Telexistence, in a method of presenting information to a remote party. Telepresence is a term indicating a technology that provides a realistic feeling as if they are faced on site with members in remote areas. As one method of realizing telepresence, Maimone and Fuchs implemented a real-time 3D telepresence environment realized by synchronizing several inexpensive depth cameras [13]. Adalgeirsson and Breazeal developed a robot that enables a speaker to navigate a remote robot to achieve nonverbal communication, thereby proving that the impression of the listener improved [14]. Wang et al. developed a micro telepresence robot that projects itself to another space remotely, moves around, communicates via video and audio, using the smart device of the user [15]. Telexistence is a term for the technology that enables a human being to have a real-time sensation of being at a place other than where they exist and being able to interact with the remote environment [16] [17] [18].

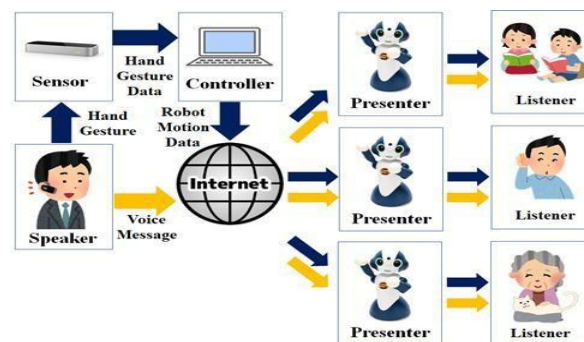


Figure 1 Dataflow of Proposed Robot Motion Broadcasting System

System Organization

The proposed system measures the gesture of the speaker in real time, converts it into the motion of the robot, transmits its motion data, and drives the robot in the remote place. In the proposed system, one speaker can operate all at once on multiple robots. Fig. 1 shows the configuration.

This system has five objects Speaker, Sensor, Controller, Presenter, Listener. Speaker performs a word message and a hand gesture to operate the robot at the same time for the listener. Sensor acquires speaker's hand gesture and converts it to data. The controller converts hand gesture data into robot motion data and transmits it via the internet. Presenter receives motion data of robot and voice message and outputs motion with the message. The listener receives information sent from the robot.

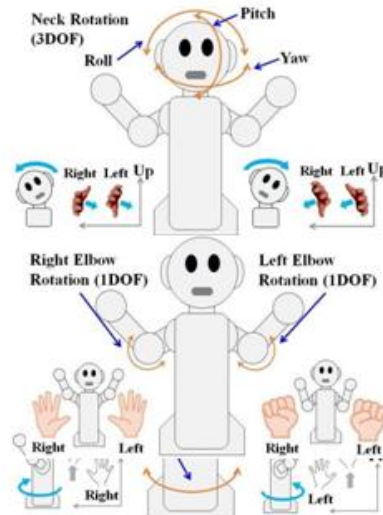


Fig. 2 shows to generate the movement of the robot from the movements of both hands of the operator. As a sensor that acquires the motion of both hands, a sensor that analyzes the movement of the operator's hand is used. This sensor detects movement of the palm and fingers of the operator in real time. Based on the detection result, the movement of the robot corresponding to the movement of the operator is generated. In general, as a method of using the gesture of the speaker for the motion of the robot, it is possible to think of a method in which the speaker moves the entire body and imitates the movement as it is on the robot.

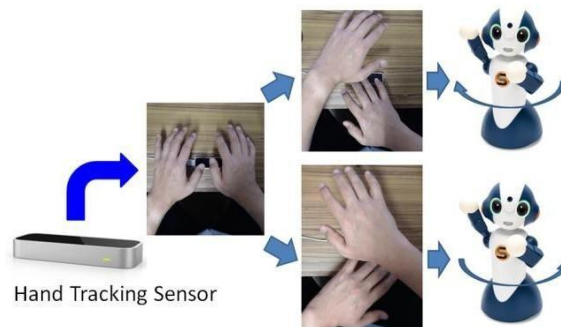


Figure 3 Move the Robot with Hands Gesture

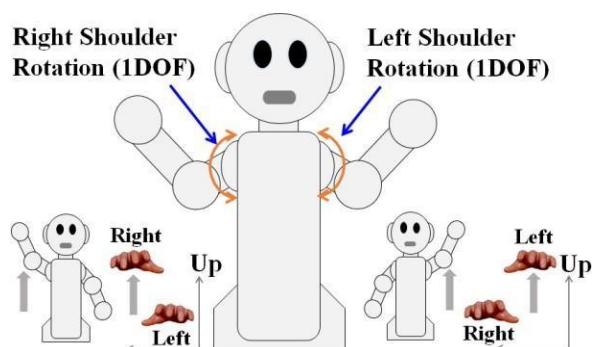


Figure 4 Mapping from Human Hand Gesture to Robot Shoulder Motion

The reason why we did not use the method of directly using the speaker's gesture in this research is to make the robot generate motions consciously rather than moving the robot with gestures that the speaker performs unconsciously.

Moreover, to recognize the gesture of the whole body, it is necessary to have a high-performance computer and photographic equipment.

Controller

In this system, the controller acquires the gesture of the hand of the speaker, converts the data into motion data of the robot, and is responsible for transmitting the data.

First, the Human Gesture Sensing (HGS) module converts the gesture into data. This work is realized by using the Leap Motion SDK used as a sensor this time. Next, using gesture to motion conversion (GMC) module, convert gesture data to motion data of the robot. To convert it, it is necessary to prepare calculation formulas after investigating the obtainable range of the gesture data and the operable angle of each joint of the robot in advance. Finally, the Robot Motion Publisher (RMP) module puts the motion data of the robot in a transmittable state. In this system, the MQTT [21] protocol is used for data transmission. By using this protocol, lightweight data transmission and reception by the Pub-Sub method can be realized.

Broadcasting Server

In this system, the server functions as a data broker for transmitting and receiving data between the controller and the robot. In the broker, each data is stored separately for each topic, and the data sent by specifying it as the latest topic from Publisher is rewritten. The subscriber gets the latest data for the specified topic. This data transmission/reception method has an advantage that there is no need to establish synchronization between the transmission side and the reception side. By dividing the topic into a plurality of topics, it is also possible to send motions simultaneously to robots of different shapes.

Communication Robots

In this system, the communication robot uses the Robot Motion Subscriber (RMS) module to acquire robot motion data from Server. The acquired data is set as the angle value of each motor by the Robot Motion Activation (RMA) module.

By doing it, the robot moves as intended by the speaker. The robot used this time has a built-in controller with Linux OS. The RMS module that receives robot motion data and the RMA module that activates robot motion is created in the development environment such as Eclipse and transferred to the built-in controller. Functions such as the acquisition of a boss message and utterance are to be used already.

CONCLUSION

In this study, we developed an information presentation system using a robot that presents gestures by the operation of the speaker simultaneously with the speaker's message. We conducted an experiment using the system and confirmed that the robot at the remote location could be operated freely by the gesture of the speaker. In the future, we can expect to create even smoother and natural robot motions if we use a faster control PC and a robot with an improved built-in controller in the future.

We also got some lessons from the experiments. One of them is that when linking the motion of human hand and the motion of the robot, it is necessary to accurately grasp the motion of the human and the motion of the robot and the motion range of both, and to define the correspondence.

REFERENCES

- [1] D. Shimizu, T. Haramaki, H. Nishino, "A Mobile Wireless Network Visualizer for Assisting Administrators," in Proc. of the 6th Int'l Conf. on Emerging Internet, Data and Web Technologies, pp. 651-662, Feb. 2018.
- [2] A. Yatsuda, T. Haramaki, H. Nishino, "An unsolicited heat stroke alert system for the elderly," in Proc. of the 2017 IEEE Int'l Conf. on Consumer Electronics - Taiwan, pp. 347-348, June 2017.
- [3] S. Okazaki, T. Haramaki, H. Nishino, "A safe driving support method using olfactory stimuli," in Proc. of the 12th Int'l Conf. on Complex, Intelligent and Software Intensive Systems, pp. 958-967, June 2018.
- [4] T. Haramaki, A. Yatsuda, H. Nishino, "A robot assistant in an edge-computing-based safe driving support system," in Proc. of the 21th Int'l Conf. on Network-Based Information Systems, pp. 144-155, Sep. 2018.
- [5] T. Haramaki, K. Goto, H. Tsutsumi, A. Yatsuda, H. Nishino, "A real-time robot motion generation system based on human gesture," in Proc. of the 13th Int'l Conf. on Broad-Band Wireless Computing, Communication and Applications, pp. 135-146, Oct. 2018.
- [6] D. Matsui, T. Minato, K. Mac Dorman, H. Ishiguro, "Generating natural motion in an android by mapping human motion," in Proc. of the 18th IEEE/RSJ Int'l Conf. on Intelligent Robots and Systems, pp. 3301-3308, July 2005.
- [7] O. Patsadu, C. Nukoolkit, B. Watanapa, "Human gesture recognition using Kinect camera," in Proc. of the 9th International Conference on Computer Science and Software Engineering, pp. 28-32, May 2012.
- [8] G. Cicirelli, C. Attolico, C. Guaragnella, T. D' Orazio, "A Kinect- based gesture recognition approach for a natural human robot interface," Int'l Journal of Advanced Robotic Systems, Mar. 2015.
- [9] K. Williams, C. Breazeal, "Reducing driver task load and promoting sociability through an affective intelligent driving agent (AIDA)," in Proc. of IFIP Conference on Human-Computer Interaction, pp. 619-626, Sep. 2013.
- [10] L. Zeng, B. Einert, A. Pitkin, G. Weber, "Haptic Rein: Design and development of an interactive haptic rein for a guidance robot," in Proc. of Int'l Conf. on Computers Helping People with Special Needs, pp. 94-101, July 2018.
- [11] L. Peng, Z. Hou, L. Peng, L. Luo, W. Wang, "Robot assisted rehabilitation of the arm after stroke: prototype design and clinical evaluation," Science China Information Sciences, vol. 60, pp. 073201:1-073201:7, July 2017.

- [12] T. Miyachi, S. Iga, T. Furuhashi, "Human robot communication with facilitators for care robot innovation," in Proc. of International Conference on Knowledge Based and Intelligent Information and Engineering Systems, pp. 1254-1262, Sep. 2017.
- [13] A. Maimone, H. Fuchs, "Encumbrance-free telepresence system with real-time 3D capture and display using commodity depth cameras," in Proc. of the 10th IEEE International Symposium on Mixed and Augmented Reality, pp. 137-146, Oct. 2011.
- [14] S. O. Adalgeirsson, C. Breazeal, "Me Bot: A robotic platform for socially embodied telepresence," in Proc. of the 5th ACM/IEEE International Conference on Human- Robot Interaction, pp. 15-22, March 2010.
- [15] J. Wang, V. Tsao, S. Fels, B. Chan, "Tippy the telepresence robot," in Proc. of Int'l Conf. on Entertainment Computing, pp. 358-361, Oct. 2011.